



The  
Patent  
Office

#  
10/030405

INVESTOR IN PEOPLE

REC'D 27 SEP 2000

The Patent Office

Y IPO  
Concept House

PCT

Cardiff Road

Newport

South Wales

NP10 8QQ


GB 563

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

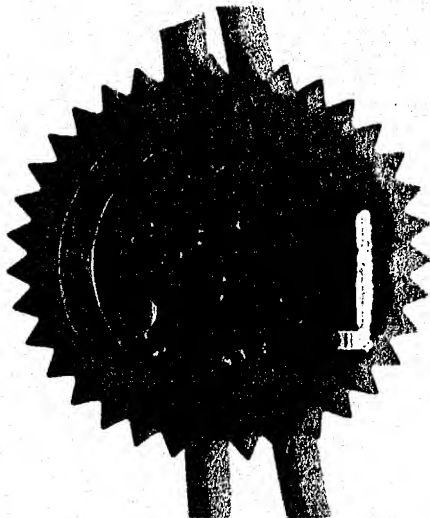

Signed

*[Signature]*

Dated

14 AUG 2000

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP23 1RH

13 AUG 1998

1. Your reference

ABC

2. Patent application number

(The Patent Office will fill in this part)

9919214.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

PHILLIP RAYMOND MICHAEL DENNE  
7 Lyndon Gate  
Chine Crescent Road  
Bournemouth  
BH2 5LW

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

593633/001

4. Title of the invention

Electromagnetic Rams

5. Name of your agent (if you have one)

A. A. THORNTON & CO.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Northumberland House,  
303 - 306 High Holborn,  
London WC1V 7LE

Patents ADP number (if you know it)

75001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

NO

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s)

Abstract

Drawing(s) 1

10. If you are also filing any of the following, state how many against each item.

Priority documents N/A

Translations of priority documents N/A

Statement of inventorship and right to grant of a patent (Patents Form 7/77) N/A

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify) NO

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

A. A. THORNTON & CO.

13 August 1999

12. Name and daytime telephone number of person to contact in the United Kingdom

Andrew B. Crawford - 0171 405 4044

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.

## Electromagnetic Rams

The present invention relates to electromagnetic rams.

Such rams are known and have various constructions but principally  
5 they are all variations of piston and cylinder devices with the output being coaxial  
with the centre line of the ram. This causes difficulty when used in a confined  
space as it means that for a full stroke, one requires twice the length of the stroke  
to be available or for a part of the ram to be received in a recess in the mounting.  
This difficulty has resulted in electromagnetic rams being limited in their uses.

10 The present invention provides an electromagnetic ram where a  
member extending transverse to the axial direction is used to transfer movement  
of the armature to the outside of the ram through an axially extending slot.

The ram is preferably in the form of a stator provided with coils  
which cooperate with the magnetic field produced by a magnetic assembly on the  
15 armature to produce motion when energised. This in turn requires the coils to be  
wound in such a manner as to form a gap through which the transverse member  
may move.

Preferably, each coil is wound as a pair of coil sections in an  
approximation to a "figure of 8" and the coils are connected in sets of three so as  
20 to be capable of being energised by signals which are out of phase with each other  
eg. by  $120^\circ$  to form a three phase drive.

In order that the present invention be more readily understood, an  
embodiment thereof will now be described with reference to the accompanying  
drawings, in which,

25 Fig. 1 is a sectional side view of an electromagnetic ram according  
to the present invention;

Fig. 2 is an end view of the ram shown in Fig. 1; and

Fig. 3 is a diagrammatic representation of a coil formed by a pair of  
coil sections.

Referring to Fig. 1, an electromagnetic ram comprises a cylindrical stator 11 formed from a steel outer tube within which is mounted an armature 12 for movement along the length of the stator 11.

5 The armature 12 is provided with a transversely extending member 14 which can take any convenient form but in this case is shown as a fin 14 which is elongate in the axial direction. The fin 14 is received in an axially extending slot 15 provided in the wall of the stator 11.

10 The armature 12 is constructed from one or more assemblies of a permanent magnet member 17 which is axially magnetised and sandwiched between two pole pieces 18. If necessary, the pole pieces may be tapered towards their radial edges so as to reduce the field in the core and also the mass of the armature. It is also possible to insert a thin compliant disc between the pole pieces of adjacent magnetic assemblies. This will allow for manufacturing tolerances but also permits rams with long stators being formed which utilise an armature having  
15 a number of magnetic assemblies.

Within the steel outer tube, the stator is provided with especially wound coils which leave a gap through which the member 14 may extend. As shown in Fig. 3, one way of achieving this is to wind each coil in the form of two coil portions in the form of a "Figure of 8". The coils are assembled in sets of  
20 three (one pair of coil sections for each of three phases for each magnetic period). The current for each phase must alternate in direction hence the way in which the coils are wound without crossing the gap of the axially extending slot 15 in the stator. The magnetic assembly or assemblies project a strong magnetic field radially outwards through the coils of the stator; the magnetic flux returning via  
25 the outer steel tube that completes the assembly.

The interior of the stator 11 is preferably lined with a hard, slotted dielectric tube that serves as a bearing and seal surface. The armature 12 is provided with a bearing surface or surfaces e.g. in the form of piston rings which are arranged to slide along the hard dielectric tube.

Each assembly of a permanent magnet member 17 sandwiched between pole pieces 18 is preferably circular in axial cross-section. Because the armature 12 may be constructed from a number of assemblies it is possible to allow relative pivotal movement between each assembly or between groups of assemblies in any direction about the central axis. Thus the armature, being carried on a series of bearing rings running on the stator lining tube which is made of a hard dielectric material, is able to follow irregularities, or even deliberate curvature, of the axis of the cylinder. This is a significant advantage if the ram is required to curve upwards or around an obstacle. It also provides tolerance to structural misalignments resulting from mechanical stress, temperature gradients or damage. While compliant discs between assemblies might be sufficient to provide the necessary amount of relative movement, other more complex coupling arrangements may be used depending upon the application. Further, the fin 14 may need to be articulated or the connection between the armature 12 and the fin 14 may need to be articulated.

With this basic electromagnetic construction, it is possible to form a number of different actuators. For example, if the stator is a closed cylinder and the actuator is fitted with a circumferential seal and thus forms a piston, a rodless pneumatic actuator can be formed when the interior is filled with a gas e.g. air which can be supplied from a fixed or variable pressure source. This in turn requires a sliding pressure seal 16 to be provided in the slot 15. Otherwise, the slot 15 need only have a protective seal against dirt and other contamination.

Also, the shape of the cylinder need not be constrained to be a circular cross section but may be elliptical so as to ensure that the fin 14 runs truly down the centre of the slot and can tolerate side forces.

Further, the slotted stator may itself be curved and if curved to a uniform radius would allow the fin of the armature to move in an arc of a circle. In this construction it may be essential to use compliant discs between each magnetic assembly in view of the fact that the armature slides against the lining



tube provided on the stator. Consequently, if the fin 14 is replaced by or coupled to a radius arm, the arm could be connected to an orthogonal shaft so that the forces exerted on the armature exert a torque on that shaft. It will be understood that by this means a high-torque may be directly produced with the minimum of moving parts. Further, if the arc is continued to a complete circle around the shaft in question, this allows the armature to be lengthened so as to fill the whole stator thus producing the maximum possible torque. The armature may then be caused to rotate continuously if required. This in turn forms a toroidal rotary motor which could be used in the precise angular positioning of optical or other special equipment.

Additionally, more than one ram can be utilised to effect movement of a single member. In other words, two or three rams could be mounted on either side of and connected to a common actuator member which in turn may have an extension projecting out of a housing. The overall length of the system need be no longer than the length of one ram but the output will of course be a multiple of that of a single ram.

The above embodiment is described as a ram having a permanent magnet armature and operating as a three phase synchronous machine. Other constructions are possible such are one where the armature uses coils and the stator is formed with permanent magnets. It is also possible to construct coils in order to form either the stator or armature as desired. In this technique when applied to a stator, the stator can be formed from a stock of planar iron rings separated from each other by cylindrical iron rings in order to form slots in a generally continuous iron cylinder. Each coil of copper is separately fitted into the slot between planar iron rings and appropriately energised to provide axially alternating magnetic poles. The iron structure could be replaced by a cast and/or metal component. Additionally, the stator may be designed to induce eddy currents in a passive armature so as to produce a low-cost machine suitable for opening doors or moving curtains.

One particular use of the ram as described is in an elevator where two or four slotted rams may be arranged against the inside walls of the elevator shaft, driving and guiding the cage silently, directly and precisely.

It will be appreciated that many uses of the actuator will require the presence of a position detector in order to provide a feedback signal to a control unit in order to properly control the relative motion of the actuator by appropriate switching of the stator coils. This is not shown in the drawings but its location will depend to a large extent on the use to which the actuator is put and the actual construction of the actuator.

In the case of an elevator, the deadload of the cage and its payload is supported by gas within the stator. The exact value of this pressure is automatically adjusted by a small valve system and a small standby compressor. The gas pressure is controlled by a simple algorithm that integrates the value of the current supplied to the actuator in order to compensate for temperature changes, lenses, load changes and elevator parking arrangements. Since air is not consumed during elevator motion the compressor need not be of a large capacity.

With long stators such as are envisaged with elevators, the stator coils should be divided into relatively short sections. This permits only those sections of the stator coil assembly adjacent the armature to be energised and switched thus improving power efficiency.



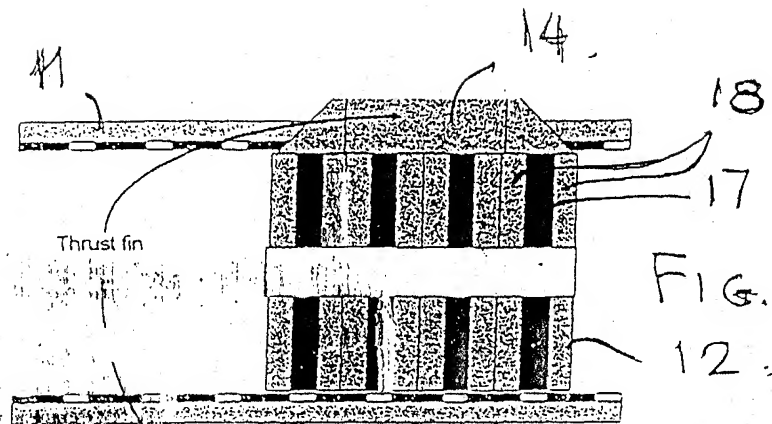


FIG. 1.

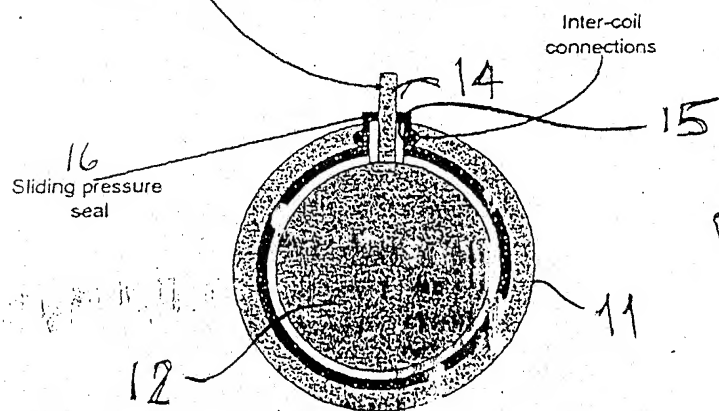


FIG. 2.

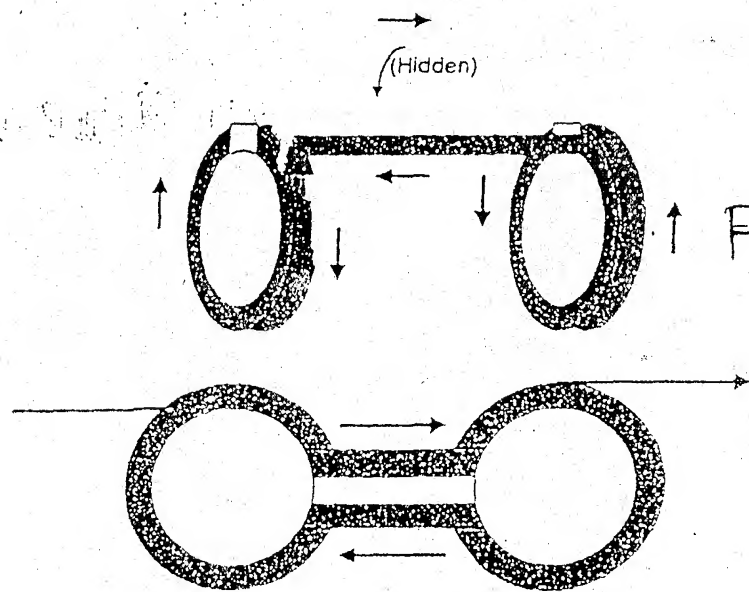


FIG. 3.